

BOX705 Inner-Recoiler Standalone Instruction

Read entire instruction guide before starting installation.

System Overview

Integrated internal retractable cable design, makes the display simple and concise. With display of smart phones, tablets and accessories, it offers retractable cable replacement, brackets adding and lockdown functions to meet needs for different security grades.

Status

1 Power on :

- Connect stand with PSU.
- No outlet, press contact on holder, use remote key to power on.

2 Power off : When alarm, no contact pressed and disconnect stand with PSU

- overtime alarming(exceed 60s)
- use remote control to release alarm

3 LED indicator :

Indicator on charger :

- No outlet, no light; b. With outlet , product disconnected, red light on; product connected, blue light on. No light when holder lifted up.


Indicator on sensor when connected to Auxiliary port:

- No outlet, no light.
- With outlet, no contact, no light; with contact, no products connected, red light on; with products, blue light on; when holder lifted up, red light on.


4 ProKey support : With outlet and in on-guard status, plug ProKey into auxiliary port, then set password. Details please refer to *ProKey Instruction*.

System Components


- Security Stand
- Charging Alarm Cable
- 3M Adhesive
- Power Adapter
- Remote Control (Optional)
- Two-Arm Bracket (Optional)
- Four-Arm Bracket (Optional)

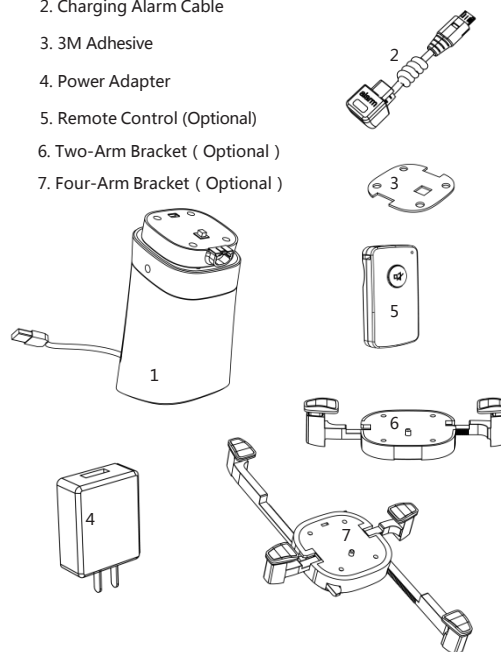


INSTALLATION STEPS

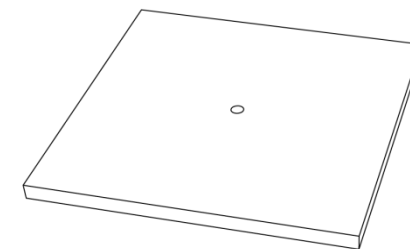


1
Drill a 20 mm diameter hole in display counter and wipe it clean.

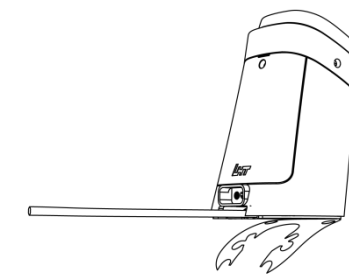


2
Remove clear film off 3M adhesive on alarming base.

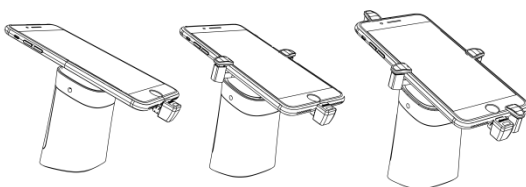


Note :
3M sticker greatly effected by temperature, please use screw installation when display heavy products on the wall.

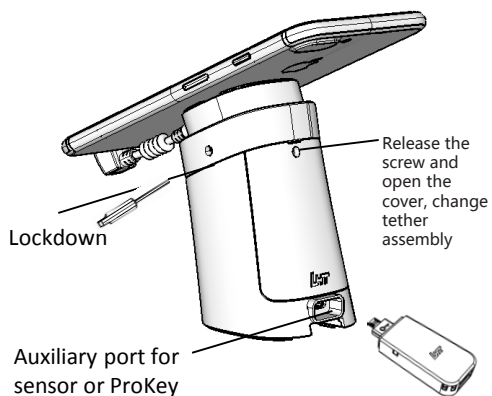

INSTALLATION STEPS

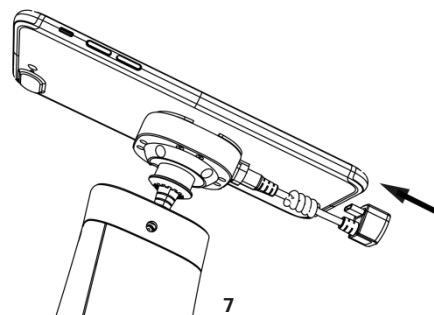


Paste holder on the center of back of phone, and connect to charging cable.

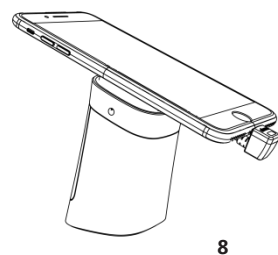


8
Use remote control release alarm.

INSTALLATION STEPS

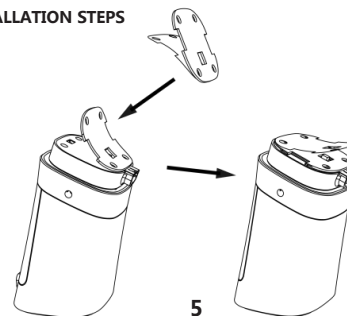


If brackets needed, please skip over this step and come to instruction of brackets. Paste sticker onto holder, and remove clear film off 3M adhesive.

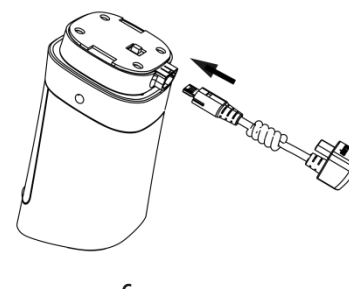


6
Plug microUSB of charging cable into port on holder.

INSTALLATION STEPS

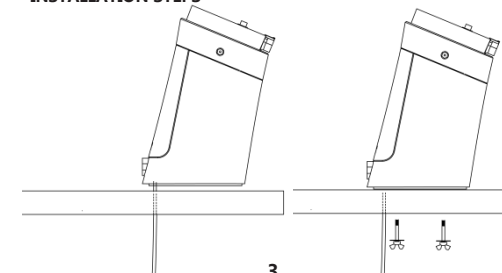


3
Slide power cord through display counter. Install security stand to proper position and press firmly for at least 10s. (Screws installation is optional.)

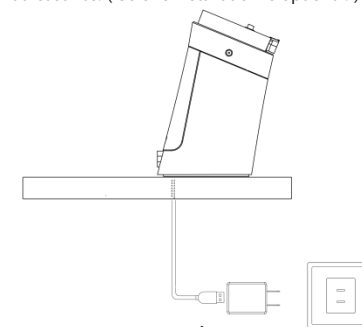


4
Plug PSU into power cord and outlet.

BOX705
Inner-Recoiler Standalone
Instruction

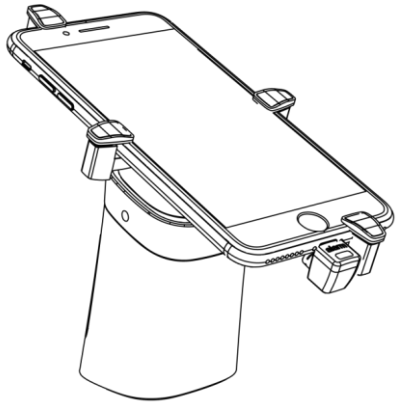


A Removal/Restoration

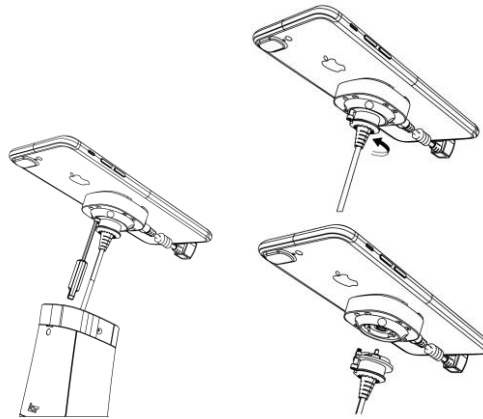

- Lift up holder to suitable height
- Loose screw with special screwdriver
- Rotate connector of holder as shown
- Separate connectors
- Achieve removal

Note : Restoration steps are in reverse order.


B LockDown

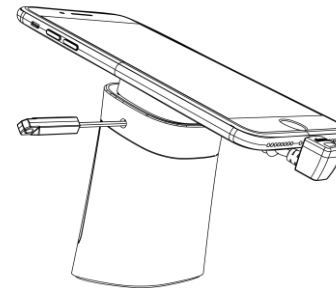

LockDown :

- Lock products on stand, and customer can only experience products on it. Can't be lifted up.
- Tighten both sides' screws with special screwdriver as shown.

C Change Tether Assembly

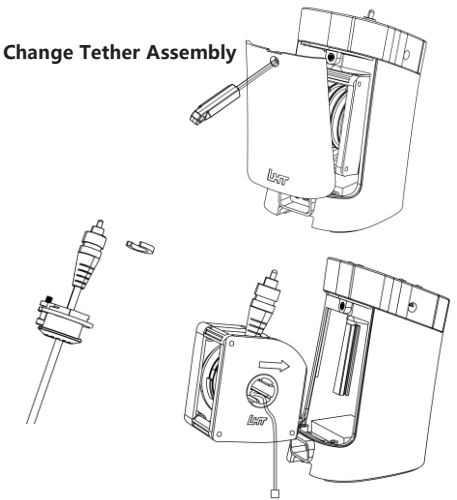


When higher security needed, standard tether can be upgraded to steel cable.

- Separate stand and holder as removal steps.
- Unlock C-ring on the connector
- Loose screw on back of stand
- Disconnect circuit connector
- Change Tether Assembly.

BRACKETS INSTALLATION

D 2-Bracket Installation Guide

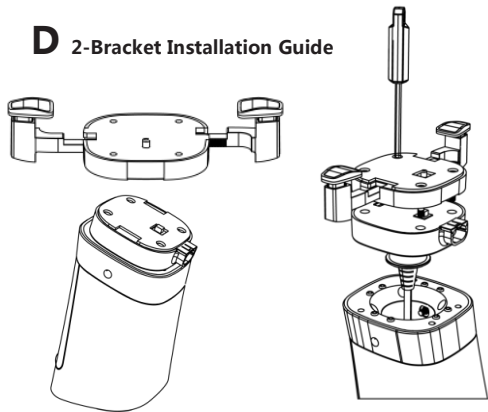

1.


Before installation, please make sure no residual of 3M sticker on holder surface.

- Screw the 2-bracket holder to stand holder with screwdriver(Pay attention to direction when install, and make sure both contacts of brackets holder and stand holder are in place.)

2.

- Remove clear film off 3M adhesive from 2-bracket holder
- Loose screw as shown, adjust brackets' width, and stick product to holder.
- Adjust width of brackets to fit product.
- Adjust thickness of brackets to fit product.
- Connect to charging cable
- Installation completed.

E 4-Bracket Installation Guide

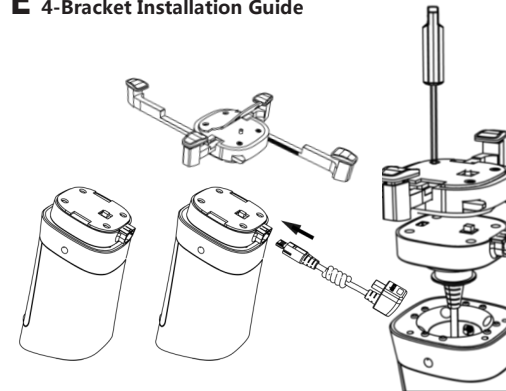

1.

Before installation, please make sure no residual of 3M sticker on holder surface.

- Connect charging cable to charging port on brackets holder
- Screw the 4-bracket holder to stand holder with screwdriver(Pay attention to direction when install, and make sure both contacts of brackets holder and stand holder are in place.)

2.

- Remove clear film off 3M adhesive from 4-bracket holder
- Loose screw as shown, adjust brackets' width, and stick product to holder
- Adjust width of brackets to fit product
- Adjust thickness of brackets to fit product
- Connect to charging cable
- Installation completed.